


Product Application Reference Dimensions (mm)


EFS25 Fluid Level Switch

Mounting and Wiring

★ Key can be connected with the controlling circuit of pumps.

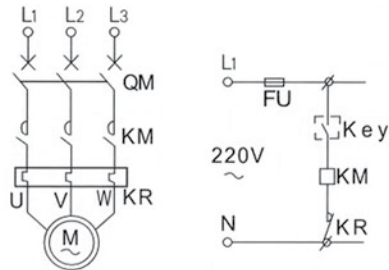


★ Use wire black and brown for emptying opens when up closes when down.


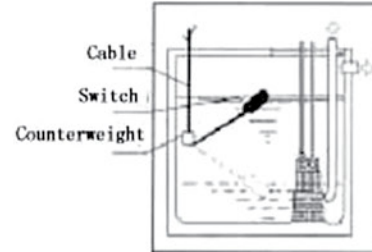


★ The differential positions of liquid can be settled by the counterweight, which is ringed on the cable of key switch. The ring on the counterweight is designed for blocking the counterweight on the cable to set the positions.

★ Use wire black and blue for filling closes when down opens when up.

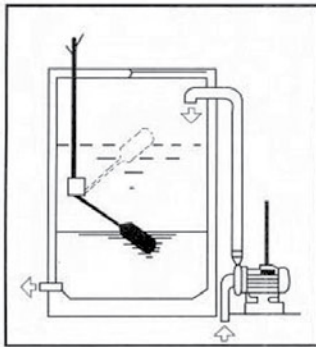

Dimension

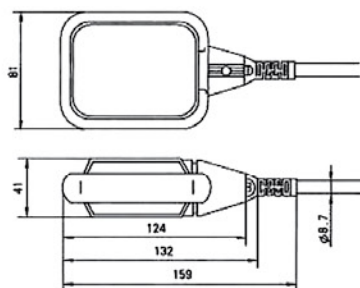

Sketch drawing of Key switch attached to drainage pump